

Price list

Low Voltage Switchgear and Controlgear Products

Effective 1st March 2022

World Class Solutions for Circuit Protection and Controls



EAT•N

Powering Business Worldwide

MOELLER is now **EAT•N**

About EAT•N

Eaton is a global leading power management company headquartered in USA, serving customers across the world. Our proven technologies enable customers to generate more power using fewer resources, answering the demands of today's fast changing world. Eaton products and services provide the power inside thousands of products and projects – from energy efficient buildings, cities, infrastructure to next generation aircraft, cars, trucks and machines. Eaton is a Fortune 500 company recognized amongst the most admired firms in our industry.

Eaton Power Quality Private Limited, India, is a 100% subsidiary and a part of electrical sector of Eaton Corporation. We are catering to every industrial segment with versatile solutions which includes Switchgear: LV & MV Solutions, Fusegear: LV & MV solutions, UPSs and software solutions.

Operating in
175
countries

92,000+
employees

100+
years of
experience

18,000+
patents

\$ 19.6
BN. 2021 IN
SALES

The Fusion Of Our Heritage

Meeting power management needs around the world

US-focused power
distribution and
control business

Power quality and
datacenter market

Global geographic
expansion

Built scale

Extended
capabilities



POWERWARE

MOELLER

飛瑞股份有限公司
PHOENIXTEC POWER CO., LTD.

COOPER

INNOVATIVE SWITCHGEAR™
Smarter, Safer Solutions

ULUSOY
electric

TRIPP-LITE

PDI
integrated performance

HUYU

الهيئة العامة
ABUNAYYAN
HOLDING

1979

1994

2004

2008

2013

2019 - 2021



Toll free number: **1800 425 5758, 1800 102 4620** Emergency number : **893 922 2522**

✉ helpdeskelectrical@eaton.com

Eaton's Product Range

Low Voltage Distribution Products

Air Circuit Breakers	PSL / IZMX
Molded Case Circuit Breakers	PDC / NZM / BZM
Disconnectors	P / PN
Mining Duty Breakers	
ATS	



Contactors

Mini Contactors & Control Relays	DILEM / DILER / DILEEM
Control Relays & Power Contactors	DILM / DILA
Vacuum Contactors	DILM / DILH /V201
4 Pole Contactors	DILMP
Capacitor Duty Contactors	DILK
Lighting Duty Contactors	DILL
DC Mill Duty Contactors	
DC Power Contactors	
Definite Purpose Contactors	



Overload Relays

Thermal Magnetic Overload Relay	ZB/ZE/ZEB
Electronic Overload Relay	Motor Insight, C440
Thermistor Based Overload Relays	EMT6



Motor Protection Circuit Breakers (MPCB)

MPCB with Push Button Control	PKZM01
MPCB with Rotary Handle Control	PKZM0
MPCB with Electronic Release	PKE



Low Voltage Control Products

Pilot Devices (22.5mm & 16mm)	RMQTitan (M22) / A22
Pilot Devices (30.5mm)	E30/E34/10250T
Foot & Palm Switch	FAK
Signal Towers	SL
Pressure Switches	MCS
Position Switches / Safety Switches	LS
Sensors	Inductive / Capacitive / Optical
Limit Switches	Precision / Mini / Metal / Metal-IP67 / Hazardous Applications



Effective 1st March 2022

Eaton's Product Range

Cam Switches 8 Switch - Disconnectors

Cam Switches upto 132KW.....	T
Switch-Disconnecter upto 110KW/315A	P
ATEX Rated Enclosures	T/P



Electronic Relays

Safety Relay	ESR5
Safety Control Relays	Easy Safety
Timing Relays	ETR2 / ETR4
Measuring & Monitoring Relays	EMR



Automation Products

Relays	Easy500/700/800
PLC's	XC / EC4
HMI/ HMI-PLC's	XVC
Smartwire Darwin Communication System	



Motor Starters

DOL / RDOL Starter upto 32A with PKZM0	
DOL / RDOL Starter upto 32A with PKE	
Soft Starters upto 900KW.....	S8014/S8114
Variable Speed Starter	DE1
Variable Speed Drive	DG1



Enclosures

IP65, Outdoor rated Polycarbonate Opaque/Transparent	CI/CI-K
MCB Individual Enclosure	AE...
MCCB / Switch Disconnecter	MCCB...
Fuse Enclosure	RS..



Solar Products

Disconnectors upto 60A, 1000V DC rated	
Disconnectors, 160A - 1400A, 1500V DC rated	
Fuse & Fuse Base, 1000V DC	
Inverters upto 1MW	
DC Combiner Boxes	
AC Switchgear	



Effective 1st March 2022



CONTENTS

Switchgear

Air Circuit Breakers.	06
Molded Case Circuit Breakers NZM Series	07-10
Molded Case Circuit Breakers BZM Series.....	10
Switch Disconnecter PN Series.....	10
MCCB Accessories.....	11-13

Contactors

Mini Contactors, DILEM- AC/ DC Operated	14
Mini Control Relays, DILER-AC/DC Operated	14
Power Contactor – AC Operated, 3 Pole	15-17
Power Contactor – DC Operated, 3 Pole	15-17
Control Relays, DILA -AC/DC Operated	15-17
Vacuum Contactors, DILM	18
Capacitor Duty Contactors types DILK	18
4 Pole Contactors type DILMP	19
Accessories for Contactors type DILM/DILA/DILMP	20-21

MPCB's

MPCB, push button control, PKZM01	22
MPCB, Rotary Handle Operated, PKZM0	22
Accessories	23

Overload Relays

Thermal Overload Relays, ZE, ZB	24-25
Type 2 Coordination Tables	24-25

For prices of other products, please contact Eaton.



- Confirms to IEC 60947-2
- Ratings: 800A to 4000A
- 55kA and 66kA, Ics=Icu=Icw (1sec) upto 690V

- Frame Size: Frame1: 800A to 2000A
Frame 2: 2500A to 4000A
- ETU available in LSI, LSIG with LED and LCD Display, Current Metering, Voltage & Power Monitoring

Standard Breaking Capacity Ics=Icu=Icw=55kA; ETU with LSIG, LCD display and Current Metering.

Also available with higher breaking capacity Ics=Icu=Icw=66kA

Frame Size	Rating (A)	Type	3 Pole		4 Pole	
			Part No.	MRP.	Part No.	MRP.
Draw-Out ACB						
I	800A	MDO	PSL5083DENGGVNSMRNN4NWNXX	257420	PSL5084DENGGVNSMRNN4NWNXX	319200
		EDO	PSL5083DENGGVNSRRNN4NWNXX	314540	PSL5084DENGGVNSRRNN4NWNXX	376320
	1000A	MDO	PSL5103DENGGVNSMRNN4NWNXX	264690	PSL5104DENGGVNSMRNN4NWNXX	324655
		EDO	PSL5103DENGGVNSRRNN4NWNXX	321810	PSL5104DENGGVNSRRNN4NWNXX	381775
	1250A	MDO	PSL5123DENGGVNSMRNN4NWNXX	290735	PSL5124DENGGVNSMRNN4NWNXX	361605
		EDO	PSL5123DENGGVNSRRNN4NWNXX	347855	PSL5124DENGGVNSRRNN4NWNXX	418725
	1600A	MDO	PSL5163DENGGVNSMRNN4NWNXX	327075	PSL5164DENGGVNSMRNN4NWNXX	389975
		EDO	PSL5163DENGGVNSRRNN4NWNXX	384195	PSL5164DENGGVNSRRNN4NWNXX	447095
	2000A	MDO	PSL5203DENGGVNSMRNN4NWNXX	396265	PSL5204DENGGVNSMRNN4NWNXX	471745
		EDO	PSL5203DENGGVNSRRNN4NWNXX	453385	PSL5204DENGGVNSRRNN4NWNXX	528865
II	2500A	MDO	PSL5253DENGGVNSMRNNANWNNX	478035	PSL5254DENGGVNSMRNNANWNNX	578670
		EDO	PSL5253DENGGVNSRRNNANWNNX	535155	PSL5254DENGGVNSRRNNANWNNX	635790
	3200A	MDO	PSL5323DENGGVNSMRNNANWNNX	579305	PSL5324DENGGVNSMRNNANWNNX	705100
		EDO	PSL5323DENGGVNSRRNNANWNNX	636425	PSL5324DENGGVNSRRNNANWNNX	762220
	4000A	MDO	PSL5403DENGGVNSMRNNANWNNX	704470	PSL5404DENGGVNSMRNNANWNNX	893165
		EDO	PSL5403DENGGVNSRRNNANWNNX	761590	PSL5404DENGGVNSRRNNANWNNX	950285
Fixed ACB						
I	800A	MF	PSL5083FENGGVNSMRNN4NWNXX	206545	PSL5084FENGGVNSMRNN4NWNXX	251970
		EF	PSL5083FENGGVNSRRNN4NWNXX	263665	PSL5084FENGGVNSRRNN4NWNXX	309090
	1000A	MF	PSL5103FENGGVNSMRNN4NWNXX	218660	PSL5104FENGGVNSMRNN4NWNXX	266505
		EF	PSL5103FENGGVNSRRNN4NWNXX	275780	PSL5104FENGGVNSRRNN4NWNXX	323625
	1250A	MF	PSL5123FENGGVNSMRNN4NWNXX	242885	PSL5124FENGGVNSMRNN4NWNXX	295580
		EF	PSL5123FENGGVNSRRNN4NWNXX	300005	PSL5124FENGGVNSRRNN4NWNXX	352700
	1600A	MF	PSL5163FENGGVNSMRNN4NWNXX	267320	PSL5164FENGGVNSMRNN4NWNXX	325820
		EF	PSL5163FENGGVNSRRNN4NWNXX	324440	PSL5164FENGGVNSRRNN4NWNXX	382940
	2000A	MF	PSL5203FENGGVNSMRNN4NWNXX	296885	PSL5204FENGGVNSMRNN4NWNXX	384315
		EF	PSL5203FENGGVNSRRNN4NWNXX	354005	PSL5204FENGGVNSRRNN4NWNXX	441435
II	2500A	MF	PSL5253FENGGVNSMRNNANWNNX	358525	PSL5254FENGGVNSMRNNANWNNX	449100
		EF	PSL5253FENGGVNSRRNNANWNNX	415645	PSL5254FENGGVNSRRNNANWNNX	506220
	3200A	MF	PSL5323FENGGVNSMRNNANWNNX	509480	PSL5324FENGGVNSMRNNANWNNX	617040
		EF	PSL5323FENGGVNSRRNNANWNNX	566600	PSL5324FENGGVNSRRNNANWNNX	674160
	4000A	MF	PSL5403FENGGVNSMRNNANWNNX	623330	PSL5404FENGGVNSMRNNANWNNX	769890
		EF	PSL5403FENGGVNSRRNNANWNNX	680450	PSL5404FENGGVNSRRNNANWNNX	827010

Standard Accessories included for Draw-out ACB: Safety shutter, Door sealing frame, Trip signalling contact, Auxiliary contacts 4NO+ 4NC, Horizontal terminals, ETU LSIG with LCD Display, Current Metering. Additionally for Electrically Operated ACB: Motor operated mechanism, with mechanical and electrical closing, motor and closing coil of 220-240V AC/DC and shunt trip of 220-240V AC/DC.

ACB Type	Price Variation in MRP	Part code digit 12&13 (GV) to replace with
For Switch Disconnector	Reduce ₹25000	NN
For LCD Display with Current & Voltage Metering	Add ₹28000	GU

Other option, to be specified at the time of ordering:

1. U/V release (at extra price)
2. Voltage rating for Trip Unit, Shunt Trip, Motor Operator and Closing Coil
3. Remote reset requirement (at extra price)
4. LCS (ready to close signal switch)
5. Protection required (LSI, LSIG with source grounding) - (at differential price)
6. Door Interlock (Left side / Right side)
7. Counter, Mechanical interlock
8. Rear terminal: Horizontal / Vertical


Note:

1. Refer catalogue for detailed order booking sheet
2. * Please contact nearest sales office for information on prices of 5000A and 6300A ACB, higher breaking capacity, 690V requirement & additional accessories.

Effective 1st March 2022

Circuit-breakers, switch-disconnectors

System overview

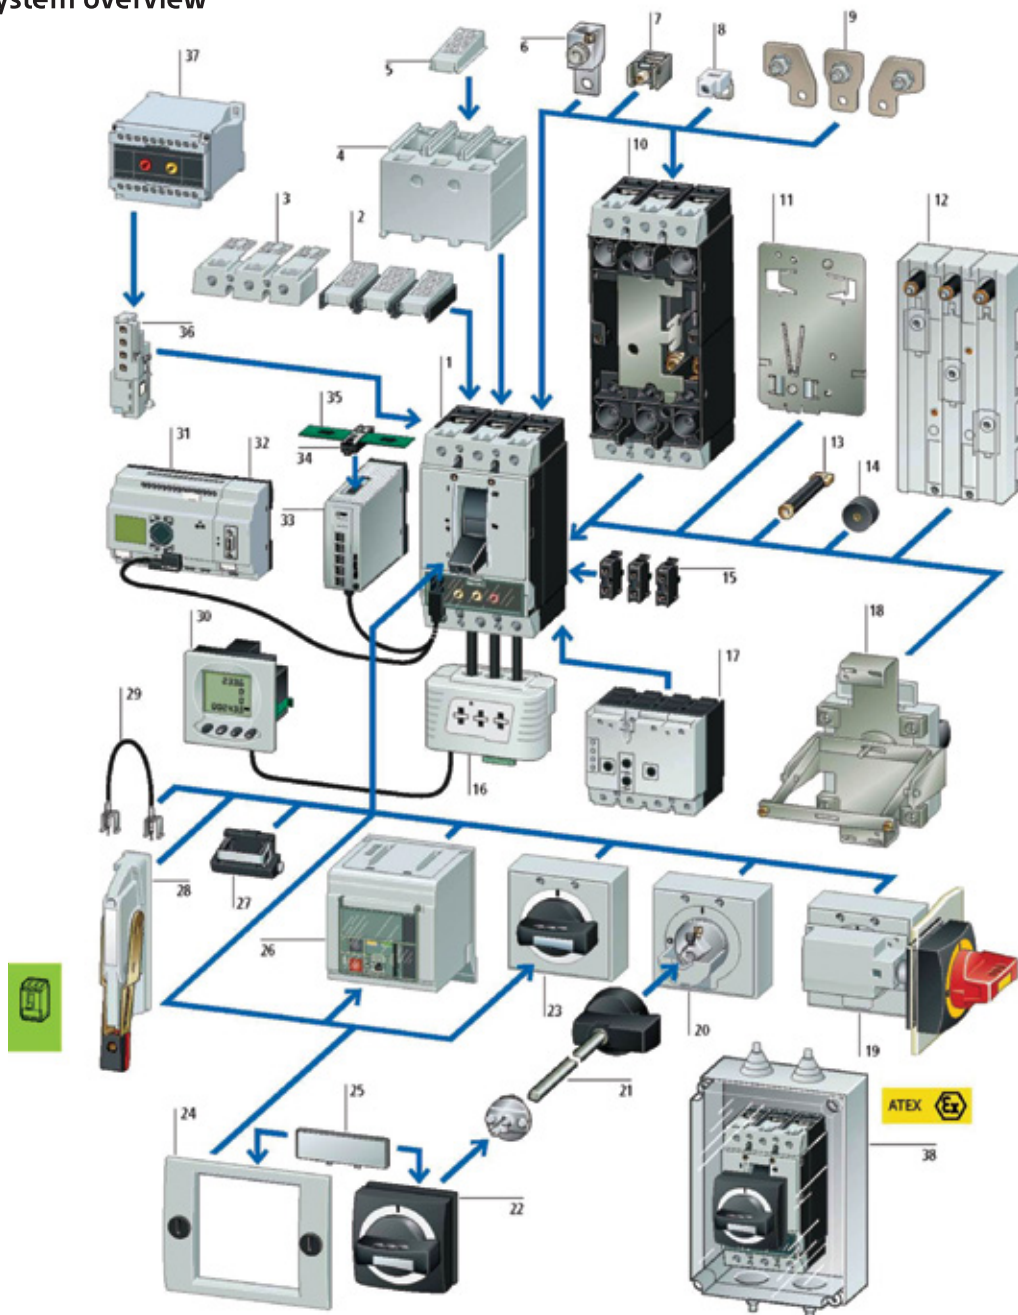

- | | |
|---|---|
| 1. Switch-Disconnecter; circuit breaker; Molded case switches | 19. Main switch rotary handle for side panel mounting |
| 2. IP2X Protection against contact with a finger | 20. Door coupling rotary |
| 3. Terminal cover, knockout | 21. Extension Shaft |
| 4. Terminal cover | 22. Handle |
| 5. IP2X protection against contact with a finger | 23. Rotary handle |
| 6. Tunnel terminals | 24. Insulating surround |
| 7. Box terminals | 25. External warning plate/markings plate |
| 8. Control circuit terminal | 26. Remote Operator |
| 9. Connection width extension | 27. Toggle lever interlock device |
| 10. Plug-in and withdrawable unit | 28. Side Operator handle |
| 11. Adapter plate | 29. Mechanical Interlock |
| 12. Busbar adapter | 30. Display |
| 13. Connecting on rear | 31. BreakerVisu Display |
| 14. Spacer | 32. NZM communication module for SmartWire-DT |
| 15. Standard auxiliary contacts, trip – indicating auxiliary switches | 33. Voltage release/Early-make auxiliary contact |
| 16. Measuring and communication modules | 34. Delay unit for undervoltage releases |
| 17. Residual-current protection device | 35. Insulated enclosures |
| 18. Rear operator | |

NZM with Thermal magnetic Trip Unit

- Global Approvals: IEC, UL, CSA, Shipping
- Energy Monitoring module with communication and/or panel front display
- Special Versions : 1000V AC and upto 1500V DC
- ClassII Front Face
- Thermal Magnetic Trip Unit:
 - Adjustable Thermal : 0.8 - 1.0 In
 - Adjustable Magnetic : 6 - 10 Ir
- Withdrawable, Plug In & Motorized options
- Ics = 100% Icu

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	20	25	NZMB1-A20	280987	10905	NZMB1-4-A20	281237	14750
	25		NZMB1-A25	280988	10905	NZMB1-4-A25	281239	14750
	32		NZMB1-A32	280989	10905	NZMB1-4-A32	281241	14750
	40		NZMB1-A40	259075	10905	NZMB1-4-A40	265799	14750
	50		NZMB1-A50	259076	10905	NZMB1-4-A50	265801	14750
	63		NZMB1-A63 ■	259077	10905	NZMB1-4-A63 ■	265803	14750
	80		NZMB1-A80 ■	259078	10905	NZMB1-4-A80 ■	265805	14750
	100		NZMB1-A100 ■	259079	10905	NZMB1-4-A100 ■	265807	14750
	125		NZMB1-A125 ■	259080	15510	NZMB1-4-A125 ■	265809	22830
	160		NZMB1-A160 ■	281230	17090	NZMB1-4-A160 ■	281243	23710
	200		NZMB2-A200 ■	259089	25385	NZMB2-4-A200 ■	265852	34245
	250		NZMB2-A250 ■	259090	26855	NZMB2-4-A250 ■	265855	35585
	300		NZMB2-A300	107518	30215	NZMB2-4-A300 ■	107582	39565
	20	36	NZMC1-A20	283293	12935	NZMC1-4-A20	283300	16335
	25		NZMC1-A25	283294	12935	NZMC1-4-A25	283302	16335
	32		NZMC1-A32	283295	12935	NZMC1-4-A32	283304	16335
	40		NZMC1-A40	271392	12935	NZMC1-4-A40	271408	16335
	50		NZMC1-A50	271393	12935	NZMC1-4-A50	271410	16335
	63		NZMC1-A63 ■	271394	12935	NZMC1-4-A63 ■	271412	16335
	80		NZMC1-A80 ■	271395	14375	NZMC1-4-A80 ■	271414	16335
	100		NZMC1-A100 ■	271396	14375	NZMC1-4-A100 ■	271416	16335
	125		NZMC1-A125 ■	271397	20255	NZMC1-4-A125 ■	271418	23525
	160		NZMC1-A160 ■	283296	21565	NZMC1-4-A160 ■	283306	24835
	200		NZMC2-A200 ■	271422	30790	NZMC2-4-A200 ■	271435	35920
	250		NZMC2-A250 ■	271423	32075	NZMC2-4-A250 ■	271438	38490
	300		NZMC2-A300	107519	33980	NZMC2-4-A300	107584	43125
	20	50	NZMN1-A20	281231	15565	NZMN1-4-A20	281245	21930
	25		NZMN1-A25	281232	15565	NZMN1-4-A25	281247	21930
	32		NZMN1-A32	281233	15565	NZMN1-4-A32	281249	20515
	40		NZMN1-A40	259081	15565	NZMN1-4-A40	265811	20515
	50		NZMN1-A50	259082	15565	NZMN1-4-A50	265813	20515
	63		NZMN1-A63 ■	259083	15565	NZMN1-4-A63 ■	265815	20515
	80		NZMN1-A80 ■	259084	15565	NZMN1-4-A80 ■	265817	20515
	100		NZMN1-A100 ■	259085	15565	NZMN1-4-A100 ■	265819	20515
	125		NZMN1-A125 ■	259086	21565	NZMN1-4-A125 ■	265821	26885
	160		NZMN1-A160 ■	281234	22220	NZMN1-4-A160 ■	281251	28300
	200		NZMN2-A200 ■	259093	32675	NZMN2-4-A200 ■	265863	38555
	250		NZMN2-A250	259094	33980	NZMN2-4-A250	265866	41170
	300		NZMN2-A300	107580	35945	NZMN2-4-A300	107586	45745
	320		NZMN3-A320	109669	49665	NZMN3-4-A320	109694	64035
	400		NZMN3-A400	109670	51625	NZMN3-4-A400	109696	66000
	500		NZMN3-A500	109671	54890	NZMN3-4-A500	109698	68615

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	20	100	NZMH1-A20	284376	19600	NZMH1-4-A20	284416	24835
	25		NZMH1-A25	284377	19600	NZMH1-4-A25	284418	24835
	32		NZMH1-A32	284378	19600	NZMH1-4-A32	284420	24835
	40		NZMH1-A40	284379	19600	NZMH1-4-A40	284422	24835
	50		NZMH1-A50	284410	19600	NZMH1-4-A50	284424	24835
	63		NZMH1-A63 ■	284411	19600	NZMH1-4-A63 ■	284426	24835
	80		NZMH1-A80 ■	284412	19600	NZMH1-4-A80 ■	284428	24835
	100		NZMH1-A100 ■	284413	19600	NZMH1-4-A100 ■	284430	24835
	125		NZMH1-A125 ■	284414	23525	NZMH1-4-A125 ■	284432	29405
	160		NZMH1-A160 ■	284415	24835	NZMH1-4-A160 ■	284434	29405
	20	150	NZMH1-A20	281281	32675	NZMH1-4-A20	281287	42475
	25		NZMH1-A25	281282	32675	NZMH1-4-A25	281289	42475
	32		NZMH1-A32	281283	32675	NZMH1-4-A32	281291	42475
	40		NZMH1-A40	259095	32675	NZMH1-4-A40	265823	42475
	50		NZMH1-A50	259096	32675	NZMH1-4-A50	265825	42475
	63		NZMH1-A63	259097	32675	NZMH1-4-A63	265827	42475
	80		NZMH1-A80	259098	32675	NZMH1-4-A80	265829	42475
	100		NZMH1-A100	259099	32675	NZMH1-4-A100	265831	42475
	125		NZMH1-A125	259100	32675	NZMH1-4-A125	265833	42475
	160		NZMH1-A160	259101	32675	NZMH1-4-A160	265871	42475
	200		NZMH2-A200	259102	35290	NZMH2-4-A200	265874	43780
	250		NZMH2-A250	259103	39860	NZMH2-4-A250	265877	50970
	300		NZMH2-A300	107581	43780	NZMH2-4-A300	107588	53580
	320		NZMH3-A320	109673	52280	NZMH3-4-A320	109700	66655
	400		NZMH2-A400	109674	53580	NZMH3-4-A400	109702	68615
	500		NZMH3-A500	109675	58810	NZMH3-4-A500	109704	71880

NZM with Microprocessor Based Trip Unit Type AE

- Global Approvals: IEC, UL, CSA, Shipping
- On board Diagnostics as standard
- Complete suite of communication solutions-Modbus/Profibus/Ethernet/SWD
- Energy Monitoring module with communication and/or panel front display
- Special Versions: 1000V AC and upto 1500V DC
- Microprocessor based Trip Unit:
 - Adjustable Thermal : 0.5 - 1.0 In
 - Adjustable Magnetic : 2 - 12 In
 - Overload Pre Alarm LED
- Withdrawable, Plug In & Motorized options
- Ics = 100% Icu

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
Normal Switching Capacity								
	400	50	NZMN3-AE400■	259114	52885	NZMN3-4-AE400■	265891	73620
	630		NZMN3-AE630■	259115	55665	NZMN3-4-AE630■	265894	77240
	800		NZMN4-AE800■	265759	107030	NZMN4-4-AE800■	265909	134555
	1000		NZMN4-AE1000■	265760	125035	NZMN4-4-AE1000■	265912	180770
	1250		NZMN4-AE1250■	265761	147240	NZMN4-4-AE1250■	265915	224065
	1600		NZMN4-AE1600■	265762	200060	NZMN4-4-AE1600■	265918	257220
High Switching Capacity								
	400	150	NZMH3-AE400■	259117	61235	NZMH3-4-AE400■	265897	90460
	630		NZMH3-AE630■	259118	64710	NZMH3-4-AE630■	265900	100205
	800	85	NZMH4-AE800■	265764	128040	NZMH4-4-AE800■	265921	160045
	1000		NZMH4-AE1000■	265765	160045	NZMH4-4-AE1000■	265924	244940
	1250		NZMH4-AE1250■	265766	184055	NZMH4-4-AE1250■	265927	256075
	1600		NZMH4-AE1600■	265767	236590	NZMH4-4-AE1600■	265930	285300
Earth Fault Protection								
	400	50	NZMN3-AE400-T■	110889	80020	NZMN3-4-AE400-T■	110902	96030
	630		NZMN3-AE630-T■	110890	85590	NZMN3-4-AE630-T■	110904	100205
	400	150	NZMH3-AE400-T■	110895	89765	NZMH3-4-AE400-T■	110906	110645
	630		NZMH3-AE630-T■	110896	104380	NZMH3-4-AE630-T■	110908	118300

■ For UL, CSA part numbers - Please contact nearest sales office
 ■ Ready Stock

NZM with Microprocessor Based Trip Unit Type VE

- Global Approvals: IEC, UL, CSA, Shipping
- On board Diagnostics as standard and Ics = 100% Icu
- Complete suite of communication solutions-Modbus/Profibus/Ethernet/SWD
- Energy Monitoring module with communication and/or panel front display
- Withdrawable, Plug IN & Motorized options
- Special Versions: 1000V AC and upto 1500V DC
- Microprocessor based Trip Unit:
 - Adjustable Overload Settings : 0.5 - 1.0 In
 - Adjustable Overload Time Delay Settings : 2 - 20 In
 - Adjustable Short Circuit Settings : 2 - 10 In
 - Adjustable Short Circuit Delay Settings : 0 - 1000ms
 - Adjustable Instantaneous Settings : 2 - 12 In
 - 12T- On/off function & Overload Pre Alarm LED

	Rated current(A)	Breaking Capacity (KA) Icu, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	100	50	NZMN2-VE100	259122	45230	NZMN2-4-VE100	265933	57760
	160		NZMN2-VE160	259123	45230	NZMN2-4-VE160	265935	57760
	250		NZMN2-VE250	259124	45230	NZMN2-4-VE250	265938	57760
	400		NZMN3-VE400	259132	56360	NZMN3-4-VE400	265957	77240
	630		NZMN3-VE630	259133	59150	NZMN3-4-VE630	265960	82810
	800		NZMN4-VE800	265769	119690	NZMN4-4-VE800	265975	153090
	1000		NZMN4-VE1000	265770	146130	NZMN4-4-VE1000	265978	222675
	1250		NZMN4-VE1250	265771	180925	NZMN4-4-VE1250	265981	264425
	1600		NZMN4-VE1600	265772	236590	NZMN4-4-VE1600	265984	313135
	100	150	NZMH2-VE100	259125	38965	NZMH2-4-VE100	265941	44620
	160		NZMH2-VE160	259126	43145	NZMH2-4-VE160	265943	52885
	250		NZMH2-VE250	259127	53580	NZMH2-4-VE250	265946	77935
	400		NZMH3-VE400	259135	62625	NZMH3-4-VE400	265963	90460
	630		NZMH3-VE630	259136	66110	NZMH3-4-VE630	265966	104380
	800	85	NZMH4-VE800	265774	140560	NZMH4-4-VE800	265987	167005
	1000		NZMH4-VE1000	265775	176050	NZMH4-4-VE1000	265990	250510
	1250		NZMH4-VE1250	265776	201795	NZMH4-4-VE1250	265993	299215
	1600		NZMH4-VE1600	265777	257470	NZMH4-4-VE1600	265996	327055

■ For UL, CSA part numbers - Please contact nearest sales office

Switch-Disconnectors Type PN

- Isolating Characteristic to IEC/EN 60947-3, VDE 0660
- Main switch characteristics including positive operation to IEC/EN 60204, VDE 0113

	Rated current(A)	3 Pole			4 Pole		
		Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	63	PN1-63	259140	8730	PN1-4-63	265999	13165
	100	PN1-100	259141	8730	PN1-4-100	266000	13165
	125	PN1-120	259142	9135	PN1-4-120	266001	14100
	160	PN1-160	281235	10070	PN1-4-160	281253	14775
	200	PN2-200	266006	20140	PN2-4-200	266012	26185
	250	PN2-250	266007	21490	PN2-4-250	266013	27530
	400	PN3-400	266017	34915	PN3-4-400	266021	44985
	630	PN3-630	266018	38275	PN3-4-630	266022	49685

BZM

- IEC 60947-2
- Class II Front Insulation
- Thermal Magnetic release (Fixed Overload and Fixed Short Circuit)

	Rated current(A)	Breaking Capacity (KA) Icu KA, 400V, 50HZ	3 Pole			4 Pole		
			Part No.	Article No.	MRP.	Part No.	Article No.	MRP.
	16	25	BZMB1-A16	111528	7200	BZMB1-4-A16	112505	9910
	20		BZMB1-A20	111531	7200	BZMB1-4-A20	112509	9910
	25		BZMB1-A25	111534	7200	BZMB1-4-A25	112513	9910
	32		BZMB1-A32	111537	7200	BZMB1-4-A32	112517	9910
	40		BZMB1-A40	111540	7200	BZMB1-4-A40	112521	9910
	50		BZMB1-A50	111543	7200	BZMB1-4-A50	112525	9910
	63		BZMB1-A63	111546	7200	BZMB1-4-A63	112529	9910
	80		BZMB1-A80	111549	7200	BZMB1-4-A80	112533	9910
	100		BZMB1-A100	111552	7200	BZMB1-4-A100	112537	9910
	125	36	BZMC2-A125	121804	14970	—	—	—
	160		BZMC2-A160	121805	15970	—	—	—
	200		BZMC2-A200	121806	18680	—	—	—
	250		BZMC2-A250	121807	18680	—	—	—

■ Ready Stock

Effective 1st March 2022

Accessories for NZM

Rotary Handle

Description	For Use With	Part No.	Article No.	MRP.
Extended Rotary Handle	NZM1	NZM1-XTVD + NZM1/2-XV4	260166 + 261232	5040
Extended Rotary Handle	NZM2	NZM2-XTVD + NZM1/2-XV4	260168 + 261232	5040
Extended Rotary Handle	NZM3	NZM3-XTVD + NZM3/4-XV4	260170 + 261234	8565
Extended Rotary Handle	NZM4	NZM4-XTVD + NZM3/4-XV4	266614 + 261234	11085

Spreaders

Frame	For Use With	Part No.	MRP.	Part No.	MRP.
1	NZM	NZM1-XKVI	1010	NZM1-4-XKVI	1195
2	NZM	NZM2-XKVI	1260	NZM2-4-XKVI	1515
3	NZM	NZM3-XKVI	1765	NZM3-4-XKVI	2205

Under Voltage Release

W/O Auxiliary Contacts

	Type	Voltage	Part No.	Article No.	MRP.
For Use with NZM1					
	AC 50/60 HZ	24 V	NZM1-XU24AC	259434	4895
		48 V	NZM1-XU48AC	259436	4715
		60 V	NZM1-XU60AC	259438	4970
		110 V-130 V	NZM1-XU110-130AC	259440	4895
		208 V-240 V	NZM1-XU208-240AC	259442	4895
		380 V- 440 V	NZM1-XU380-440AC	259444	4895
		480 V- 525 V	NZM1-XU480-525AC	259446	6200
	DC	12 V	NZM1-XU12DC	259450	4970
		24 V	NZM1-XU24DC	259452	4970
		110 V-130 V	NZM1-XU110-130DC	259458	5155
220 V-250 V		NZM1-XU220-250DC	259460	5155	
For Use with NZM2 & NZM3					
	AC 50/60 HZ	24 V	NZM2/3-XU24AC	259491	4695
		48 V	NZM2/3-XU48AC	259493	5655
		60 V	NZM2/3-XU60AC	259495	5655
		110 V-130 V	NZM2/3-XU110-130AC	259497	4695
		208 V-240 V	NZM2/3-XU208-240AC	259499	4695
		380 V- 440 V	NZM2/3-XU380-440AC	259501	5090
		480 V- 525 V	NZM2/3-XU480-525AC	259503	7825
	DC	12 V	NZM2/3-XU12DC	259507	5655
		24 V	NZM2/3-XU24DC	259509	4900
		110 V-130 V	NZM2/3-XU110-130DC	259515	4695
220 V-250 V		NZM2/3-XU220-250DC	259517	5090	
For Use with NZM4					
	AC 50/60 HZ	24 V	NZM4-XU24AC	266189	9785
		48 V	NZM4-XU48AC	266190	11630
		60 V	NZM4-XU60AC	266191	11630
		110 V-130 V	NZM4-XU110-130AC	266192	9785
		208 V-240 V	NZM4-XU208-240AC	266193	9785
		380 V- 440 V	NZM4-XU380-440AC	266194	9785
		480 V- 525 V	NZM4-XU480-525AC	266195	9785
	DC	12 V	NZM4-XU12DC	266203	9785
		24 V	NZM4-XU24DC	266204	9785
		110 V-130 V	NZM4-XU110-130DC	266207	9785
220 V-250 V		NZM4-XU220-250DC	266208	9785	

Effective 1st March 2022

Auxiliary Contact & Trip Indicating Contact for use with NZM

	Type	NO	NC	Part No.	Article No.	MRP.
	Single Contact	1	—	M22-K10	216376	255
		—	1	M22-K01	216378	255
	Double Contact	1	1	M22-CK11	107940	625
		2	—	M22-CK20	107898	605
		—	2	M22-CK02	107899	605

Shunt Release

W/O Auxiliary Contacts

	Type	Voltage	Part No.	Article No.	MRP.
For Use with NZM1					
	AC/DC	12 V AC/DC	NZM1-XA12AC/DC	259706	5220
		24 V AC/DC	NZM1-XA24AC/DC	259708	3915
		48 V AC/DC	NZM1-XA48AC/DC	259720	5220
		60 V AC/DC	NZM1-XA60AC/DC	259722	5220
		110 V-130 V AC/DC	NZM1-XA110-130AC/DC	259724	3915
		208 V-250 V AC/DC	NZM1-XA208-250AC/DC	259726	3915
		380 V-440 V AC/DC	NZM1-XA380-440AC/DC	259728	4180
For Use with NZM2 & NZM3					
	AC/DC	12 V AC/DC	NZM2/3-XA12AC/DC	259752	5220
		24 V AC/DC	NZM2/3-XA24AC/DC	259754	4240
		48 V AC/DC	NZM2/3-XA48AC/DC	259756	4240
		60 V AC/DC	NZM2/3-XA60AC/DC	259758	5220
		110 V-130 V AC/DC	NZM2/3-XA110-130AC/DC	259760	4240
		208 V-250 V AC/DC	NZM2/3-XA208-250AC/DC	259763	4240
		380 V-440 V AC/DC	NZM2/3-XA380-440AC/DC	259766	5220
For Use with NZM4					
	AC/DC	12 V AC/DC	NZM4-XA12AC/DC	266446	6850
		24 V AC/DC	NZM4-XA24AC/DC	266447	6850
		48 V AC/DC	NZM4-XA48AC/DC	266448	6850
		60 V AC/DC	NZM4-XA60AC/DC	266449	6850
		110 V-130 V AC/DC	NZM4-XA110-130AC/DC	266450	6850
		208 V-250 V AC/DC	NZM4-XA208-250AC/DC	266451	6850
		380 V-440 V AC/DC	NZM4-XA380-440AC/DC	266452	6850

Effective 1st March 2022

Motor Mechanism

	Operating Voltage	Part No.	Article No.	MRP.
	For Use with NZM2			
	110 V-130 V 50/60 HZ	NZM2-XR110-130AC	259830	55450
	208 V-240 V 50/60 HZ	NZM2-XR208-240AC	259832	55450
	380 V-440 V 50/60 HZ	NZM2-XR380-440AC	259834	55450
	24 V-30 V DC	NZM2-XR24-30DC	259836	55450
	48 V-60 V DC	NZM2-XR48-60DC	259838	65235
	110 V-130 V DC	NZM2-XR110-130DC	259840	55450
	220 V-250 V DC	NZM2-XR220-250DC	259842	55450
	For Use with NZM3			
	110 V-130 V 50/60 HZ	NZM3-XR110-130AC	259848	55450
	208 V-240 V 50/60 HZ	NZM3-XR208-240AC	259850	55450
	380 V-440 V 50/60 HZ	NZM3-XR380-440AC	259852	55450
	24 V-30 V DC	NZM3-XR24-30DC	259854	55450
	48 V-60 V DC	NZM3-XR48-60DC	259856	65235
	110 V-130 V DC	NZM3-XR110-130DC	259858	55450
	220 V-250 V DC	NZM3-XR220-250DC	259860	55450
	For Use with NZM4			
	110 V-130 V 50/60 HZ	NZM4-XR110-130AC	266684	78285
	208 V-240 V 50/60 HZ	NZM4-XR208-240AC	266685	78285
	380 V-440 V 50/60 HZ	NZM4-XR380-440AC	266686	78285
	24 V-30 V DC	NZM4-XR24-30DC	266691	78285
	48 V-60 V DC	NZM4-XR48-60DC	266692	91330
	110 V-130 V DC	NZM4-XR110-130DC	266693	78285
	220 V-250 V DC	NZM4-XR220-250DC	266694	78285

For prices of Spreaders and Phase barriers, please contact Eaton sales office

Accessories for BZM

Accessories	BZM1	MRP.	BZM2	MRP.
Aux Contacts				
1NO	M22-K10	255	M22-K10	255
1NC	M22-K01	255	M22-K01	255
Shunt Release				
230-240VAC	BZM1-XA230-240VAC	On Request	BZM2-XA230-240VAC	On Request
400-440VAC	BZM1-XA400-440VAC		BZM2-XA400-440VAC	
24VDC	BZM1-XA24VDC		BZM2-XA24VDC	
Under Voltage Release				
230-240VAC	BZM1-XU230-240VAC	On Request	BZM2-XU230-240VAC	On Request
400-440VAC	BZM1-XU400-440VAC		BZM2-XU400-440VAC	
24VDC	BZM1-XU24VDC		BZM2-XU24VDC	
Rotary Handle	BZM1-XDV	On Request		
Extended Rotary Handle	BZM1-XTVD	On Request		
Rod, 400mm	BZM1-XV4			

Spreaders

Rating (Amps)	For Use With	Part No.	MRP.	Part No.	MRP.
100	BZM1	BZM1-XKVI	385	BZM1-4-XKVI	490
250	BZM2	BZM2-XKVI	415		

Effective 1st March 2022

Contactor

Mini Contactor & Control Relay- DILE...

- Compact Size
- Interlocked Opposing Auxiliary Contacts – High Degree of Safety
- Up to 4 Add on Auxiliary Contacts
- Low Coil Consumption – Energy Savings
- Inbuilt suppressor in DC Coil Version
- Accessories: Mechanical Interlock, Reverser & Star Delta Wiring Kit etc.

Mini Contactor - DILEM, 3 Pole	AC-3 at 400V (A)	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
				AC-Coil		DC-Coil	
	6.6	1 N/O	—	DILEEM-10(...) ■	1425	DILEEM-10-G(...) ■	1980
	6.6	—	1 N/C	DILEEM-01(...) ■	1425	DILEEM-01-G(...) ■	1980
	9	1 N/O	—	DILEM-10(...) ■	1490	DILEM-10-G(...) ■	2310
	9	—	1 N/C	DILEM-01(...) ■	1490	DILEM-01-G(...) ■	2310
	12	1 N/O	—	DILEM12-10(...) ■	1625	DILEM12-10-G(...) ■	2440
	12	—	1 N/C	DILEM12-01(...) ■	1625	DILEM12-01-G(...) ■	2440

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)

Coil Voltage	DILEEM-10(...)	DILEEM-01(...)	DILEM-10(...)	DILEM-01(...)	DILEM12-10(...)	DILEM12-01(...)
AC	Article No					
42/48V, 50/60HZ	51612	51637	51782	51791		
110/120V, 50/60HZ	51611	51636	51783	51792	127072	127088
220/240V, 50/60HZ	51609	51634	51785	51794		
230/240V, 50/60HZ	51608	51633	51786	51795	127075	127091
415/480V, 50/60HZ	51605	51630	51789	51798		
24V 50/60Hz	51596	51621	21417	20402	127079	127095
DC Coil Voltage						
12V DC	51644	51649	79594	79642		
24V DC	51643	51650	10213	10343	127132	127137
48V DC	51642	51648	10245	10496		
110V DC	51640	51646	10309	10136		
220V DC	51639	51645	10325	10168		

For all other coil voltages, please contact EATON sales office.

Mini Control Relay - DILER, 4 Pole	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
			AC-Coil		DC-Coil	
	4 N/O	–	DILER-40(...) ■	1550	DILER-40-G(...) ■	2110
	3 N/O	1 N/C	DILER-31(...) ■	1550	DILER-31-G(...) ■	2110
	2 N/O	2 N/C	DILER-22(...) ■	1550	DILER-22-G(...) * ■	2110

Part No.	DILER-40(...)	DILER-31(...)	DILER-22(...)
AC Coil Voltage	Article No		
48V 50Hz	10190	10044	10201
110/120V, 50/60Hz	51756	51765	51774
220/240V, 50/60Hz	51758	51767	51776
230/240V, 50/60Hz	51759	51768	51777
415/480V, 50/60Hz	51762	51771	51780
24V 50/60Hz	21924	21594	21704
42V 50/60Hz	33459	29869	29433
DC Coil Voltage			
12V DC	79711	79761	80728
24V DC	10223	10157	10042
48V DC	10255	10205	10346
110V DC	10287	10253	10043
220V DC	10303	10269	10091

For all other coil voltages, please contact EATON sales office.

*DILER-22-G Add-on-Block can't be mounted

■ Ready Stock

Effective 1st March 2022

Control Relay: DILA and Power Contactor: 3 Pole DILM

- Global Approvals: IEC, UL, CSA, CE
- Low Coil Consumption: Energy Savings
- High Electrical Lifespan
- Double Box Terminals: High Wiring Integrity & Reliability
- Coil Terminals on front as standard for quick & easy wiring
- Type 2 Coordinated Starters with PKZ MPCB's & NZM MCCB's
- Electronic Actuated Coil version available - Contact Eaton

DC Operated added benefits

- Electronic actuated Coil as standard from 17A - 170A, Optional 185A onwards
- Suppressor Integrated into Coil Circuit: Cost savings, Easy engineering
- Direct actuation by PLC upto 32A: No need for coupler relays
- Same dimension as AC operated contactor: Easy engineering
- Wide band coil (0.7 - 1.3) as standard from 17A-170A: Reliable performance

Control Relay - DILA	AC-15 at 400V (A)	Auxiliary Contacts		Part No.	MRP.	Part No.	MRP.
	Screw Terminals			AC-Coil		DC-Coil	
	4	4 N/O	–	DILA-40(...)	1505	DILA-40(...)	2270
	4	3 N/O	1 N/C	DILA-31(...)	1505	DILA-31(...)	2270
	4	2 N/O	2 N/C	DILA-22(...)	1505	DILA-22(...)	2270
	Spring Loaded Terminals						
	4	4 N/O	–	DILAC-40(...)	On Request	DILAC-40(...)	On Request
	4	3 N/O	1 N/C	DILAC-31(...)		DILAC-31(...)	
	4	2 N/O	2 N/C	DILAC-22(...)		DILAC-22(...)	

To order please complete the part no. by adding Voltage Suffix and mention Article No.

Power Contactor, 3 Pole	AC-3 at 400V (A)	Motor KW at 400V, 50Hz	Auxiliary Contacts		Part No.	MRP. AC-Coil	MRP. DC-Coil
	7	3	1 N/O	–	DILM7-10(...)	1300	1935
	7	3	–	1 N/C	DILM7-01(...)	1300	1935
	9	4	1 N/O	–	DILM9-10(...)	1370	2265
	9	4	–	1 N/C	DILM9-01(...)	1370	2265
	12	5.5	1 N/O	–	DILM12-10(...)	1605	2375
	12	5.5	–	1 N/C	DILM12-01(...)	1605	2375
	15	7.5	1 N/O	–	DILM15-10(...)	1735	2755
	15	7.5	–	1 N/C	DILM15-01(...)	1735	2755
	17	7.5	1 N/O	–	DILM17-10(...)	2350	4610
	17	7.5	–	1 N/C	DILM17-01(...)	2350	4610
	25	11	1 N/O	–	DILM25-10(...)	2515	4930
	25	11	–	1 N/C	DILM25-01(...)	2515	4930
	32	15	1 N/O	–	DILM32-10(...)	5005	9295
	32	15	–	1 N/C	DILM32-01(...)	5005	9295
	38	18.5	1 N/O	–	DILM38-10(...)	7315	10815
	38	18.5	–	1 N/C	DILM38-01(...)	7315	10815
	40	18.5	–	–	DILM40(...)	7775	11680
	50	22	–	–	DILM50(...)	9565	15485
	65	30	–	–	DILM65(...)	13585	17425
	72	37	–	–	DILM72(...)	16110	20110
	80	37	–	–	DILM80(...)	16785	21145
	95	45	–	–	DILM95(...)	20985	25860
	115	55	–	–	DILM115(...)	26060	30250
	150	75	–	–	DILM150(...)	34750	38900
	170	90	–	–	DILM170(...)	40680	47120
	185	90	2 NO	2 NC	DILM185A/22(...)	45200	48775
	225	110	2 NO	2 NC	DILM225A/22(...)	49590	51970
	250	132	2 NO	2 NC	DILM250/22(...)	58605	63445
	300	160	2 NO	2 NC	DILM300A/22(...)	71735	77105
	400	200	2 NO	2 NC	DILM400/22(...)	87318	93025
	500	250	2 NO	2 NC	DILM500/22(...)	117480	124065

- To order please complete the part no. by adding Voltage Suffix and mention Article No.
- For Power Contactors with spring loaded terminal, please contact Eaton sales office

Voltage Suffix and Article Numbers for ordering

Coil Voltage	DILA-40(...)	DILA-31(...)	DILA-22(...)	DILAC-40(...)	DILAC-31(...)	DILAC-22(...)
AC	Article No					
110/120V, 50/60HZ	276326	276361	276396	276438	276470	276502
220/240V, 50/60HZ	276328	276363	276398			
230/240V, 50/60HZ	276329	276364	276399	276441	276473	276505
400/440V, 50/60HZ	276331	276366	276401			
24V 50/60Hz	276333	276368	276403	276445	276477	276509
42V 50/60Hz	276334	276369	276404			
DC Coil Voltage						
24V DC	276344	276379	276414	276456	276488	276520
48V DC	276345	276380	276415			
110V DC	276347	276382	276417	276459	276491	276523
220V DC	276348	276383	276418	276460	276492	276524

For all other coil voltages, please contact EATON sales office.

Coil Voltage	DILM7-10(...)	DILM7-01(...)	DILM9-10(...)	DILM9-01(...)	DILM12-10(...)	DILM12-01(...)
AC	Article No					
42/48V, 50/60HZ	276546		276686		276826	
110/120V, 50/60HZ	276547	276582	276687	276722	276827	276862
220/240V, 50/60HZ	276549	276584	276689	276724	276829	276864
230/240V, 50/60HZ	276550	276585	276690	276725	276830	276865
24V 50/60Hz	276554	276589	276694	276729	276834	276869
400/440V, 50/60Hz	276552	276587	276992	276727	276832	276867
DC Coil Voltage						
24V	276565	276600	276705	276740	276845	276880
48V	276566	276601	276706	276741	276846	276881
110V	276568	276603	276708	276743	276848	276883
220V	276569	276604	276709	276744	276849	276884

Coil Voltage	DILM15-10(...)	DILM15-01(...)	DILM17-10(...)	DILM17-01(...)	DILM25-10(...)	DILM25-01(...)
AC	Article No					
42/48V, 50/60HZ			277000		277128	
110/120V, 50/60HZ	290055	290090	277001	277033	277129	277161
190/220V, 50/60HZ			277002		277130	
220/240V, 50/60HZ			277003		277131	
230/240V, 50/60HZ	290058	290093	277004	277036	277132	277164
380/440V, 50/60HZ			277005		277133	
400/440V, 50/60HZ			277006	277038	277134	277166
415/480V, 50/60HZ			277007		277135	
24V 50/60Hz	290062	290097	277008	277040	277136	277168
42V 50/60Hz			277009		277137	
110V 50/60Hz			277010	277042	277138	277170
220V 50/60Hz			277011	277043	277139	277171
230V 50/60Hz	290066	290101	277012	277044	277140	277172
DC Coil Voltage						
24V	290073	290108				
RDC24			277018	277050	277146	277178
RDC60			277019	277051	277147	277179
RDC130			277020	277052	277148	277180
RDC240			277021	277053	277149	277181

Note :-

RDC 48(24-48VDC)
 RA 110(48-110V,40-60Hz / 48-110VDC)
 RA 250(110-250V,40-60Hz / 110-250VDC)
 RAC 500 (250-500V,40-60Hz), DC on Request

RDC 24 (24-27V DC)
 RDC 60 (48-60V DC)
 RDC 130 (110-130V DC)
 RDC 240 (200-240V DC)

RAC 24 (24V)
 RAC 48 (42-48V)
 RAC 120 (100-120V)
 RAC 240 (190-240V)
 RAC 440 (380-440V)
 RAC 500 (480-500V)

Effective 1st March 2022

Voltage Suffix and Article Numbers for ordering

Coil Voltage	DILM32-10(...)	DILM32-01(...)	DILM38-10(...)	DILM38-01(...)	DILM40(...)	DILM50(...)
AC	Article No.					
110/120V, 50/60HZ	277257	277289	112425	112453	277763	277827
220/240V, 50/60HZ	277259	277291	112427	–	277765	277829
230/240V, 50/60HZ	277260	277292	112428	112456	277766	277830
415/480V, 50/60HZ	277263	277295	112431	–	277769	277833
24V 50/60HZ	277264	277296	112432	112460	277770	277834
42V 50/60HZ	277265	–	112433	–	277771	277835
110V 50/60HZ	277266	277298	112434	112462	277772	277836
220V 50/60HZ	277267	277299	112435	112463	277773	277837
230V 50/60HZ	277268	277300	112436	112464	277774	277838

DC Coil Voltage

RDC24	277274	277306	112442	112470	277780	277844
RDC60	277275	277307	112443	112471	277781	277845
RDC130	277276	277308	112444	112472	277782	277846
RDC240	277277	277309	112445	112473	277783	277847

Coil Voltage	DILM65(...)	DILM72(...)	DILM80(...)	DILM95(...)
AC	Article No.			
110,120V, 50/60HZ	277891	109191	239399	239477
220/240V, 50/60HZ	277893	109193	239401	239479
230/240V, 50/60HZ	277894	107670	239402	239480
24V 50/60HZ	277898	109197	239406	239484
42V 50/60HZ	277899	–	239407	239485

DC Coil Voltage

RDC24	277908	107671	239416	239510
RDC60	277909	–	239417	239511
RDC130	277910	109208	239418	239512
RDC240	277911	109209	239419	239513

Coil Voltage	DILM115(...)	DILM150(...)	DILM170(...)	DILM185A/22(...)	DILM225A/22(...)
AC	Article No.				
RAC24	239545	239585	107010	139534	139544
RAC48	239546	239586	107011	139535	139545
RAC120	239547	239587	107012	139536	139546
RAC240	239548	239588	107013	139537	139547
RAC440	239549	239589	107014	139538	139548
RAC500	239550	239590	107015	139539	139549

DC Coil Voltage

RDC24	239555	239591	107016	139540	139550
RDC60	239560	239592	107017	139541	139551
RDC130	239567	239593	107018	139542	139552
RDC240	239572	239594	107019	139543	139553

Coil Voltage	DILM250/22(...)	DILM300A/22(...)	DILM400/22	DILM500/22(...)
AC/DC	Article No.			
RDC48	208199	139554	208207	208211
RA110	208200	139555	208208	208212
RA250	208201	139556	208209	208213
RAC500	208202	139557	208210	208214
110-120V 50/60Hz	274189	139558	274195	274198
220-240V 50/60Hz	274190	139559	274196	274199

For all other coil voltages, please contact EATON sales office.

Effective 1st March 2022

Vacuum Contactors - Type DILM

- Global Approvals : IEC , UL , CSA, CE
- Ideal for high dust and high switching duty applications
- Direct actuation from PLC
- Switching in Vacuum - Very High Electrical Life
- Low Coil Consumption : Energy Savings

AC-3 at 400V (A)	AC-3 at 400V (A)	Motor KW at 400V, 50Hz	Auxiliary Contacts	Part No.	MRP.
					AC & DC-Coil
	580	315	2 NO 2 NC	DILM580/22(...)	347780
	650	355	2 NO 2 NC	DILM650/22(...)	369105
	750	400	2 NO 2 NC	DILM750/22(...)	523720
	820	450	2 NO 2 NC	DILM820/22(...)	551025
	1000	560	2 NO 2 NC	DILM1000/22(...)	On request
	1600	900	2 NO 2 NC	DILM1600/22(...)	

For lower rating vacuum contactors, please contact Eaton office

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from next table)

Coil Voltage	DILM580/22(...)	DILM650/22(...)	DILM750/22(...)	DILM820/22(...)	DILM1000/22(...)	DILM1600/22(...)
AC/DC	Article No.					
RA110	208215	208218	208221	208224	—	—
RA250	208216	208219	208222	208225	267214	—
RAC500	208217	208220	208223	208226	271990	—

Capacitor Duty Contactor - DILK

- Welding- resistant for capacitors with inrush current peaks up to $180 \times I_N$
- The capacitors are pre-charged via the early-make auxiliary contacts
- DILK..., cannot be combined with other auxiliary contacts
- With group compensation multi-stage capacitor banks are connected to the mains are required.
- The contactors for capacitors are weld-resistant with inrush current peaks up to $180 \times I_N$ due to their special contacts

Capacitor Duty Contactor - DILK	KVAR 400V,3ph, 50/60 Hz	Auxiliary Contacts	Part No.	MRP.
	12.5	1 NO + 1 NC	DILK12-11(...)	4720
	20	1 NO + 1 NC	DILK20-11(...)	5970
	25	1 NO + 1 NC	DILK25-11(...)	6250
	33.3	1 NO	DILK33-10(...)	14455
	50	1 NO	DILK50-10(...)	20415

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)

Coil Voltage	DILK12-11(...)	DILK20-11(...)	DILK25-11(...)	DILK33-10(...)	DILK50-10(...)
AC	Article No.				
230/240V, 50/60HZ	293988	294010	294032	294054	294076
400/440V, 50/60HZ	293990	294012	294034	294056	294078

For all other coil voltages, please contact EATON sales office.

Power Contactors - DILMP, 4 Pole

- Global Approvals: IEC, UL, CSA, CE
- High Electrical Lifespan
- Coil Terminals on front as standard for quick & easy wiring
- Suppressor Integrated in all DC Coil Contactors and in Electronic Coil actuated AC Contactors
- Low Coil Consumption: Energy Savings
- Double Box Terminals : High Wiring Integrity & reliability
- Electronic Actuated Coils : Extremely Low Consumption, High Energy Savings

Power Contactors - DILMP, 4 Pole	AC-1 Amps	Main Contacts	Auxiliary Contacts	Part No.	MRP.	Part No.	MRP.
				AC Operated		DC Operated	
	22	4NO	— —	DILMP20(...)	2120	DILMP20(...)	3560
	32	4NO	1NO —	DILMP32-10(...)	3495	DILMP32-10(...)	5045
	32	4NO	— 1NC	DILMP32-01(...)	3495	DILMP32-01(...)	5045
	45	4NO	1NO —	DILMP45-10(...)	3960	DILMP45-10(...)	6630
	45	4NO	— 1NC	DILMP45-01(...)	3960	DILMP45-01(...)	6630
	63	4NO	— —	DILMP63(...)	10210	DILMP63(...)	12130
	80	4NO	— —	DILMP80(...)	16115	DILMP80(...)	17620
	125	4NO	— —	DILMP125(...)	21490	DILMP125(...)	22160
	160	4NO	— —	DILMP160(...)	22160	DILMP160(...)	24845
	200	4NO	— —	DILMP200(...)	27105	DILMP200(...)	31570

To order please complete the part no. by adding Voltage Suffix and mention Article No., (Select from table below)

Coil Voltage	DILMP20(...)	DILMP32-10(...)	DILMP32-01(...)	DILMP45-10(...)	DILMP45-01(...)	DILMP63(...)
AC	Article No.					
110,120V,50/60HZ	276967	109790	118912	109819	119815	109848
230/240V,50/60HZ	276970	109797	118911	109826	119814	109855
24V 50/60HZ	276974	109799	191943	109828	—	109857
230V 50/60HZ	276978	109796	—	109825	—	109883
DC Coil Voltage						
24V DC	276985	—	—	—	—	—
RDC24	—	109811	118913	109840	118916	109869

Coil Voltage	DILMP80(...)	DILMP125(...)	DILMP160(...)	DILMP200(...)
AC	Article No.			
110,120V,50/60HZ	109887	—	—	—
230/240V,50/60HZ	109884	—	—	—
RAC120(100-120V 50/60HZ)	—	109903	109913	109923
RAC240	—	109905	109915	109925
RAC24	—	109904	109914	109924
DC Coil Voltage				
RDC24	109898	109910	109920	109930

For all other coil voltages, please contact EATON sales office.

Auxiliary Contact Modules for Mini Contactors

- Interlocked Opposing contacts - High Reliability and safety

Auxiliary Contact Modules for Mini Contactors	Pole	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP.
	2 Pole	– 2 N/C	DILEEM DILEM DILEM12 DILER DILEM4	02DILE	010240	435
		1 N/O 1 N/C		11DILE	010224	435
		2 N/O –		20DILE	010208	435
	4 Pole	– 4 N/C		04DILE	010256	705
		1 N/O 3 N/C		13DILE	002397	705
		2 N/O 2 N/C		22DILE	010288	705
		3 N/O 1 N/C		31DILE	048912	705
		4 N/O		40DILE	010304	705

Auxiliary Contact Modules for Contactors

- Interlocked Opposing contacts - High Reliability and safety

Auxiliary Contact Modules for Contactors	Pole	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP.
	2 Pole	– 2 N/C	DILM7...DILM38 DILMP20...DILMP45 DILA... DILL...	DILA-XHI02	276420 ■	420
		1 N/O 1 N/C		DILA-XHI11	276421 ■	390
		2 N/O –		DILA-XHI20	276422 ■	390
	4 Pole	– 4 N/C		DILA-XHI04	276424 ■	755
		1 N/O 3 N/C		DILA-XHI13	276425 ■	705
		2 N/O 2 N/C		DILA-XHI22	276426	705
		3 N/O 1 N/C		DILA-XHI31	276427 ■	705
		4 N/O		DILA-XHI40	276428 ■	705

Auxiliary Contacts		For Use with Contactor	Part No.	Article No.	MRP
2 N/O –		DILM40...DILM170 DILMP63...DILMP200 DILMF40...DILMF150	DILM150-XHI20	277945	460
1 N/O 1 N/C			DILM150-XHI11	277946	460
1 N/O 1 N/C			DILM150-XHIA11	283463	460
– 2 N/C			DILM150-XHI02	277947	460
4 N/O –			DILM150-XHI40	277948	705
3 N/O 1 N/C			DILM150-XHI31	277949	705
2 N/O 2 N/C			DILM150-XHI22	277950	705
2 N/O 2 N/C			DILM150-XHIA22	283464	705
1 N/O 3 N/C			DILM150-XHI13	277951	705
– 4 N/C			DILM150-XHI04	277952	705

Side Mounting, Screw Terminal

Auxiliary Contacts		For Use with Contactor	Part No.	Article No.	MRP
1 N/O –		DILM7...DILM15 DILMP20 DILA...	DILA-XHI10-S	115948	750
– 1 N/C			DILA-XHI01-S	115949	750
1 N/O 1 N/C		DILM17...DILM38	DILM32-XHI11-S	101371	785
1 N/O 1 N/C		DILM250...DILH2600	DILM820-XHI11-SI	208281	805
1 N/O 1 N/C			DILM820-XHI11-SA	208282	805
1 N/O 1 N/C		DILM40...DILM225A DILMP63...DILMP200 DILMF40...DILMF95	DILM1000-XHI11-SI	278425	805
1 N/O 1 N/C			DILM1000-XHI11-SA	278427	805

Suppressor

Suppressor	For Use With	Voltage	Part No.	Article No.	MRP
RC- Suppressors	DILE...	24 - 48	RCDILE48	044264	725
		110 - 250	RCDILE250	046320	725
	DILM7 - DILM15 DILMP20 DILA	24 - 48	DILM12-XSPR48	281199	665
		110 - 240	DILM12-XSPR240	281200	665
		240 - 500	DILM12-XSPR500	281201	665
	DILM17 - DILM32 DILK12 - DILK25 DILL DILMP32 - DILMP45	24 - 48	DILM32-XSPR48	281202	840
		110 - 240	DILM32-XSPR240	281203	840
		240 - 500	DILM32-XSPR500	281204	840
	DILM40 - DILM95 DILK33 - DILK50 DILMP63-DILMP200	24 - 48	DILM95-XSPR48	281205	995
		110 - 240	DILM95-XSPR240	281206	995
		240 - 500	DILM95-XSPR500	281207	995
Varistor- Suppressors	DILE...	24 - 48	VGDILE48	010320	595
		48 - 130	VGDILE130	150681	595
		110 - 250	VGDILE250	010336	595
		380 - 415	VGDILE415	010463	595
	DILM7 - DILM15 DILMP20 DILA	24 - 48	DILM12-XSPV48	281208	655
		48 - 130	DILM12-XSPV130	281209	655
		130- 240	DILM12-XSPV240	281210	655
		240 - 500	DILM12-XSPV500	281211	655
	DILM17 - DILM32 DILK12 - DILK25 DILL DILMP32 - DILMP45	24 - 48	DILM32-XSPV48	281212	840
		48 - 130	DILM32-XSPV130	281213	840
		110 - 240	DILM32-XSPV240	281214	840
		240 - 500	DILM32-XSPV500	281215	840
	DILM40 - DILM95 DILK33 - DILK50 DILMP63-DILMP200	24 - 48	DILM95-XSPV48	281216	995
		48 - 130	DILM95-XSPV130	281217	995
		130- 240	DILM95-XSPV240	281218	995
		240 - 500	DILM95-XSPV500	281219	995

Mechanical Interlock

For Use With	Part No.	Article No.	MRP
DILE...	MVDILE	010113	665
DILM7...DILM15, DILMP20, DILA	DILM12-XMV	281196	400
DILM17..DILM38, DILMP32..DILMP45, DILMF8...DILMF32	DILM32-XMV	281197	400
DILM40...DILM72,DILMP63...DILMP80, DILMF40...DILMF65	DILM65-XMV	281198	400
DILM80...DILM170, DILMP125..DILMP200, DILMF80, DILMF150	DILM150-XMV	240081	6010
DILM185A, 225A, 250, 300A, 400, 500	DILM500-XMV	208289	6010
DILM580, 650, 750, 820, 1000	DILM820-XMV	208288	On Request

PKZM01 - Motor Protective Circuit Breaker, Push Button Type

KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
 50KA	0.16	0.1 - 0.16	PKZM01-0.16	278475	4540
	0.25	0.16 - 0.25	PKZM01-0.25	278476	4540
	0.4	0.25 - 0.4	PKZM01-0.4	278477	4540
	0.63	0.4 - 0.63	PKZM01-0.63	278478	5110
	1	0.63 - 1	PKZM01-1	278479	5195
	1.6	1 - 1.6	PKZM01-1.6	278480	5195
	2.5	1.6 - 2.5	PKZM01-2.5	278481	5295
	4	2.5 - 4	PKZM01-4	278482	5530
	6.3	4 - 6.3	PKZM01-6.3	278483	5530
	10	6.3 - 10	PKZM01-10	278484	5685
	12	8 - 12	PKZM01-12	278485	6195
	16	10 - 16	PKZM01-16	283390	6980
	20	16 - 20	PKZM01-20	283383	7375
	25	20 - 25	PKZM01-25	288893	7680

PKZM0 - Motor Protective Circuit Breaker, Rotary Knob Type

KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
 150KA	0.16	0.1 - 0.16	PKZM0-0.16	072730	4630
	0.25	0.16 - 0.25	PKZM0-0.25	072731	4630
	0.4	0.25 - 0.4	PKZM0-0.4	072732	4630
	0.63	0.4 - 0.63	PKZM0-0.63	072733	5210
	1	0.63 - 1	PKZM0-1	072734	5300
	1.6	1 - 1.6	PKZM0-1.6	072735	5300
	2.5	1.6 - 2.5	PKZM0-2.5	072736	5400
	4	2.5 - 4	PKZM0-4	072737	5640
	6.3	4 - 6.3	PKZM0-6.3	072738	5640
	10	6.3 - 10	PKZM0-10	072739	5800
50KA	12	8 - 12	PKZM0-12	0278486	6320
	16	10 - 16	PKZM0-16	046938	7120
	20	16 - 20	PKZM0-20	046988	8390
	25	20 - 25	PKZM0-25	046989	8520
	32	25 - 32	PKZM0-32	278489	13290

PKZM4 - Motor Protective Circuit Breaker, Rotary Knob Type

KA (Iq) Rating at 400/415v	Rated Current (A)	Over Load Range (A)	Part No.	Article No.	MRP
150KA	16	10 - 16	PKZM4-16	222350	17455
	25	16 - 25	PKZM4-25	222352	17455
50KA	32	25 - 32	PKZM4-32	222353	17455
	40	32 - 40	PKZM4-40	222354	17550
	50	40 - 50	PKZM4-50	222355	21760
	58	50 - 58	PKZM4-58	222394	21760
	63	55 - 63	PKZM4-63	222413	21760

Accessories

Type			Part No.	Article No.	MRP
Auxiliary Contacts					
Front Mounted	1N/O	–	NHI-E-10-PKZ0 	082884	780
	1N/O	1N/C	NHI-E-11-PKZ0 	082882	960
	–	1N/C	NHI-E-01-PKZ0-C 	229682	1490
Side Mounted	1N/O	1N/C	NHI1 1-PKZ0 	072896	1065
	1N/O	2N/C	NHI1 2-PKZ0 	072895	1230
	2N/O	1N/O	NHI2 1-PKZ0 	072894	1230
Trip Contact	2N/O	–	AGM2-10-PKZ0 	072898	1950
	–	2N/C	AGM2-01-PKZ0 	072899	1950
Shunt Release	AC DC	230V 24V	A-PKZ0 	073187	2750
			A-PKZ0 	073200	2750
UV Release	AC	230V	U-PKZ0 	073135	2750
Rotary Handle, IP65	Rotary Handle, Black		PKZ0-XH	106132	3275
	Rotary Handle, Red-Yellow		PKZ0-XRH	106133	4095
IP 65 Enclosure	PKZM01		CI-PKZ01-G 	281404	3275
			CI-PKZ01-SVB 	281405	4240
			CI-PKZ01-PVT 	281406	6285
	PKZM0		CI-K2-PKZ0-G 	219654	4640
			CI-K2-PKZ0-GR 	219655	4775
	PKZM4		CI-K4-PKZ4-G 	225524	9285
			CI-K4-PKZ4-GR 	225525	9285

Overload Relay

- Phase failure sensitivity to IEC/EN 60947, VDE 0660 Part 102
- Test/off push button
- Reset push button
- Trip-free release
- Direct Mounting

ZE...	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILE... DIULEM/21/MV SDAINLEM	ZE-0.16 ■	014263	2205
	0.16-0.24			ZE-0.24 ■	014285	2205
	0.24-0.4			ZE-0.4 ■	014300	2205
	0.4-0.6			ZE-0.6 ■	014333	2205
	0.6-1			ZE-1.0 ■	014376	2205
	1-1.6			ZE-1.6 ■	014432	2205
	1.6-2.4			ZE-2.4 ■	014479	2205
	2.4-4			ZE-4 ■	014518	2205
	4-6			ZE-6 ■	014565	2205
	6-9			ZE-9 ■	014708	2230
	9-12			ZE-12 ■	014752	2230

ZB12	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILM7...DILM15	ZB12-0.16 ■	278431	2205
	0.16-0.24			ZB12-0.24 ■	278432	2205
	0.24-0.4			ZB12-0.40 ■	278433	2205
	0.4-0.6			ZB12-0.60 ■	278434	2205
	0.6-1			ZB12-1 ■	278435	2205
	1-1.6			ZB12-1.60 ■	278436	2205
	1.6-2.4			ZB12-2.4 ■	278437	2205
	2.4-4			ZB12-4 ■	278438	2205
	4-6			ZB12-6 ■	278439	2205
	6-10			ZB12-10 ■	278440	2230
	9-12			ZB12-12 ■	278441	2230
	12-16			ZB12-16 ■	290168	2265

ZB32	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	0.1-0.16	1 N/O + 1 N/C	DILM17...DILM38	ZB32-0.16 ■	278442	2415
	0.16-0.24			ZB32-0.24 ■	278443	2415
	0.24-0.4			ZB32-0.40 ■	278444	2415
	0.4-0.6			ZB32-0.60 ■	278445	2415
	0.6-1			ZB32-1 ■	278446	2415
	1-1.6			ZB32-1.6 ■	278447	2415
	1.6-2.4			ZB32-2.4 ■	278448	2415
	2.4-4			ZB32-4 ■	278449	2415
	4-6			ZB32-6 ■	278450	2415
	6-10			ZB32-10 ■	278451	2435
	10-16			ZB32-16 ■	278452	2435
	16-24			ZB32-24 ■	278453	4065
	24-32			ZB32-32 ■	278454	4275
	32-38			ZB32-38 ■	112474	4275

ZB65	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	6-10	1 N/O + 1 N/C	DILM40...DILM72	ZB65-10	278455	5105
	10-16			ZB65-16	278456	5105
	16-24			ZB65-24	278457	5105
	24-40			ZB65-40	278458	4825
	40-57			ZB65-57	278459	7585
	50-65			ZB65-65	278460	7585
	65-75			ZB65-75	108792	7995

■ Ready Stock

Effective 1st March 2022

ZB150	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	35-50	1 N/O + 1 N/C	DILM80...DILM170	ZB150-50	278462	16765
	50-70			ZB150-70	278463	16765
	70-100			ZB150-100	278464	16765
	95-125			ZB150-125	278465	16765
	120-150			ZB150-150	278466	16765
	145-175			ZB150-175	107316	18100

Z5	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	50-70	1 N/O + 1 N/C	DILM185 DILM225	Z5-70/FF225A	139572	20115
	70-100			Z5-100/FF225A	139573	20115
	95-125			Z5-125/FF225A	139574	20115
	120-160			Z5-160/FF225A	139575	20115
	160-220			Z5-220/FF225A	139576	20115
	200-250			Z5-250/FF225A	139577	20115
	50-70		DILM250	Z5-70/FF250	210070	20115
	70-100			Z5-100/FF250	210071	20115
	95-125			Z5-125/FF250	210072	20115
	120-160			Z5-160/FF250	210073	20115
	160-220			Z5-220/FF250	210074	20115
	200-250			Z5-250/FF250	210075	20115
	200-300		DILM300	Z5-300/FF250	139578	21455

ZW7 Current Transformer - Operated Overload Relay

ZW7	Setting Range of O/L release (A)	Auxiliary Contacts	For Use with Contactor	Part No.	Article No.	MRP
	42-63	1 N/O + 1 N/C		ZW7-63	000245	20115
	60-90			ZW7-90	002618	20115
	85-125			ZW7-125	004991	20115
	110-160			ZW7-160	007364	21455
	160-240			ZW7-240	009737	21455
	190-290			ZW7-290	052448	21455
	270-400			ZW7-400	045329	21455
	360-540			ZW7-540	047702	28830
	420-630			ZW7-630	050075	28830

Accessories

Base
For Separate Mounting

	For Use with	Part No.	Article No.	MRP
	ZB32	ZB32-XEZ	278473	885
	ZB65	ZB65-XEZ	278474	1340

ZW7 Current Transformer - Operated Overload Relay

AC-3 380 V 400 V 415 V	Rated operation current 400 V	Rated short circuit current		Overload release	Short-circuit release	MPCB	Contactor
P KW	I _e A	I _q KA		I _r KA	I _{rm} A	Part No.	Part No.
0.06	0.21	150	(50)	0.16-0.25	3.5	PKZM0-0.25	DILM7-..
0.09	0.31	150	(50)	0.25-0..4	5.6	PKZM0-0.4	DILM7-..
0.12	0.41	150	(50)	0.40-0.63	8.82	PKZM0-0.63	DILM7-..
0.18	0.6	150	(50)	0.40-0.63	8.82	PKZM0-0.63	DILM7-..
0.25	0.8	150	(50)	0.63-1	14	PKZM0-1	DILM7-..
0.37	1.1	150	(50)	1.00-1.6	22.4	PKZM0-1.6	DILM7-..
0.55	1.5	150	(50)	1.00-1.6	22.4	PKZM0-1.6	DILM7-..
0.75	1.9	150	(50)	1.60-2.5	35	PKZM0-2.5	DILM7-..
1.1	2.6	150	(50)	2.50-4	56	PKZM0-4	DILM7-..
1.5	3.6	150	(50)	2.50-4	56	PKZM0-4	DILM7-..
2.2	5	150	(50)	4.00-6.3	88.2	PKZM0-6.3	DILM7-..
3	6.6	150	(50)	6.3-10	140	PKZM0-10	DILM17-..
4	8.5	150	(50)	6.3-10	140	PKZM0-10	DILM17-..
5.5	11.3	50		8-12	168	PKZM0-12	DILM17-..
7.5	6(15.5)2	50		10-16	224	PKZM0-16	DILM17-..
11	21.7	50		20-25	350	PKZM0-25	DILM25-..
15	29.3	50		25-32	448	PKZM0-32	DILM32-..
18.5	36	50		32-40	560	PKZM4-40	DILM40
22	41	50		40-50	700	PKZM4-50	DILM50
30	55	50		50-58	812	PKZM4-58	DILM65
37	68	50		63-80	8-14*	NZMN1-M80	DILM80
45	81	50		80-100	8-12.5*	NZMN1-M100	DILM95
55	99	50		80-100	8-14*	NZMN2-M160	DILM115
75	134	50		125-160	8-14*	NZMN2-M160	DILM150
90	161	50		160-200	8-14*	NZMN2-M200	DILM185
110	196	50		160-200	8-14*	NZMN2-M200	DILM225

Star Delta Starter, 400/415V

Kw	Rating (A)	S/C Current	MPCB/MCCB			Contactor			Timer
			Type	O/L Release	S/C Release	Line	Delta	Star	
5.5	11.3	50	PKZM0-12	8...12	168	DILM17	DILM17	DILM17	ETR4-51
7.5	15.2	50	PKZM0-16	10...16	224	DILM17	DILM17	DILM17	ETR4-51
11	21.7	50	PKZM0-25	20...25	350	DILM17	DILM17	DILM17	ETR4-51
12.5	25	50	PKZM0-25	20...25	350	DILM17	DILM17	DILM17	ETR4-51
15	29.3	50	PKZM0-32	25...32	448	DILM17	DILM17	DILM17	ETR4-51
18.5	36	50	PKZM4-40	32...40	560	DILM40	DILM40	DILM40	ETR4-51
22	41	50	PKZM4-50	40...50	700	DILM40	DILM40	DILM40	ETR4-51
30	55	50	PKZM4-58	50...58	812	DILM40	DILM40	DILM40	ETR4-51
37	68	50	NZMN1-M80	63...80	8-14	DILM80	DILM80	DILM50	ETR4-51
45	81	50	NZMN1-M100	80...100	8-12.5	DILM80	DILM80	DILM50	ETR4-51
55	99	50	NZMN1-M100	80...100	8-14	DILM80	DILM80	DILM50	ETR4-51
65	116	50	NZMN2-M125	100...125	8-14	DILM95	DILM95	DILM65	ETR4-51
75	134	50	NZMN2-M160	125...160	8-14	DILM115	DILM115	DILM80	ETR4-51
90	161	50	NZMN2-M200	160...200	8-14	DILM185	DILM185	DILM115	ETR4-51
110	196	50	NZMN2-M200	160...200	8-14	DILM185	DILM185	DILM115	ETR4-51

Global technology Regional solutions

Electrical
standards and
certifications

America | Europe | Middle East | Africa | Asia Pacific



Terms & Conditions

1. Prices are Maximum Retail Prices, Ex Warehouse.
2. Prices are subject to change without prior notice.
3. Prices applicable at the time of delivery will be charged.
4. Normal stock items classification is subject to change without prior notice
5. Warranty: Products are covered under warranty for a period of 12 months from the date of supply against any manufacturing defect subject to usage under normal conditions and as per technical parameters set out in technical catalogues and installation manuals.

Eaton's liability shall be limited to replace/repair the defective product, at its option, ex warehouse basis, after the defective products is returned to our warehouse/sales office.



India Head Office

Eaton Power Quality Pvt. Ltd.
2, EVR Street, Sedarpet
Industrial Estate
Pondicherry-605111
Tel: +91 413 2672000
Enquiries - EatonElectricalIndia@eaton.com

www.eaton.com

© 2022 Eaton Corporation All Rights Reserved India

Offices Across India

Mumbai

Unit No. 101 & 102 "A" wing,
1st Floor, 215 Atrium, Andheri - Kurla
Road, Andheri (East),
Mumbai - 400 059.
Mobile: +91 8291967878, 9321199760

Chennai

No. 36, Nehru Street,
Old Mahabhalipuram Road,
Sholinganallur, Chennai-600 119, India
Tel: +91 44 66501544/45
Mobile: +91 9884775774, 9381381414

Delhi

Unit A1 & B1, 3rd Floor, TDI Centre
Plot No. 7, Jasola, New Delhi-110025
Tel: +91 11 45851800
Mobile: +91 9711789514, 9310003714,
9582250517

Bangalore

4th Floor, Prestige Atrium, Central Street
Bangalore 560001, India
Tel: +91 80 49012200
Mobile: +91 7290030399, 9742252517

Kolkata

Matrix Tower, DN-24, 2nd Floor
Room no. 203, Sector - V,
Salt Lake City, Kolkata-700091
Tel: +91 33 40040991/92/93
Mobile: +91 9051809099

Pune

145, Off. Mumbai - Pune Road
Pimpri, Pune-411018
Tel: +91 29 30611886,
Mobile: +91 9326506988, 9028970800

Vadodara

Mobile: +91 7290009954

Coimbatore

Mobile: +91 9381381414,
9344893165

Hyderabad

Tel: +91 40 40189601
Mobile: +91 7290031227

Ahmedabad

Mobile: +91 9377464065

Chandigarh

Mobile: +91 9501177119

Indore

Mobile: +91 9977236899,
7580942940

* Product information & specification are subject to change due to continuous product evolution. For latest information please contact Eaton sales office.